


## Technical specification

### Dimensions:

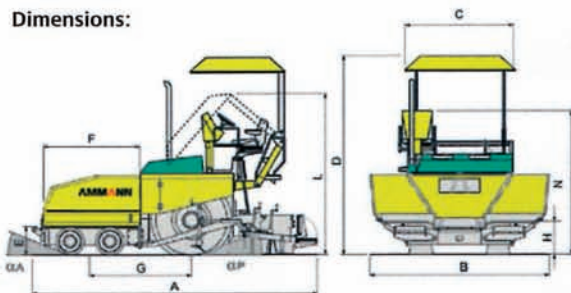

A	B	C	D	E	F	G	H	L	N
4120	2900	1650	3100	480	1350	1380	560	2650	2210
$\alpha A$	$\alpha P$								
24°	14°								

### Screed Options: PSV 270 E/G

Max paving widths:



### Equipment

#### Standard

- Automatic heating control
- Augers height hydraulically adjustable
- Four wheel drive (DT)
- ISR system (Screed Assist)
- Folding canopy

#### Optional

- Mechanical longitudinal levelling system
- Slope control system
- Reduction plates at 500 mm
- Mechanical extensions at 3300 mm

### Wheeled Paver APW 270 E/G

Length (transport)	mm	3930
Dimensions		(see ill.)
<b>Engine</b>		
Manufacturer		Deutz D2011L03i
Type		Air / Oil cooling, Diesel
No. of cylinders		3
Power (DIN/ISO 3046/1) at 2500 rpm	kW	33.2 (45 PS)
Max torque		Nm 137 at 1700 rpm
Generator		14V-60 A
<b>Brakes</b>		
Service brake		Hydrostatic
Parking brake/Emergency		Multiple disks negative brake on reduction gears
<b>Traction - Steering</b>		
Transmission type		Hydrostatic
Steering type		Hydraulic
Internal turning radius	m	2.80
<b>Performances</b>		
Production	t/h	150
Layer thickness	mm	5-250
Hopper capacity	t	6
Speed (transfer)	km/h	0-10
Speed (work)	m/min.	0-40
<b>Tank capacity</b>		
Fuel tank	l	70
Hydraulic oil	l	75
Ecological liquid	l	15
<b>Wheels</b>		
Traction		265 x 70-R17.5
Steering		Ø 415 x 180
<b>Weights (CECE)</b>		
Paver with screed	kg	5200